

HYDRO-CURE®

Cartridge Tank Pleated Sediment Filters



Dual O-rings in upright position for Clack Cartridge Tank.



Dual O-rings in the downward position for other cartridge tanks on the market.




Opposite end of filter.

Clack Cartridge Tank Pleated Sediment Filters deliver high-performance filtration with a flexible design that adapts to a variety of systems.

With dual O-ring configurations, these filters fit securely in Clack Cartridge Tanks, ensuring easy installation and a reliable seal.

Available in 1, 5, 20, and 50-micron ratings, they offer precision filtration tailored to your specific water quality needs.

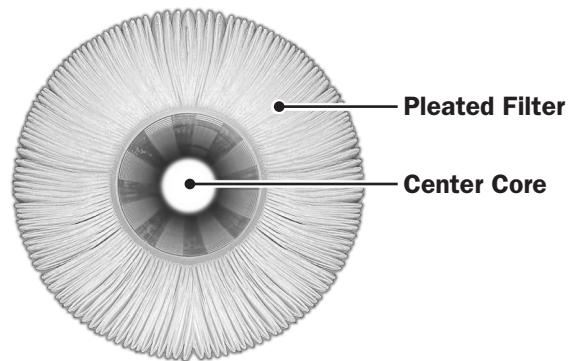

ORDER NUMBER	DESCRIPTION	NOMINAL MICRON RATING	QUANTITY PER CARTON	QUANTITY PER MASTER CARTON
C3400-PL01	CT Sediment Filter PL 01 MIC	1 Micron	1	6
C3400-PL05	CT Sediment Filter PL 05 MIC	5 Micron	1	6
C3400-PL20	CT Sediment Filter PL 20 MIC	20 Micron	1	6
C3400-PL50	CT Sediment Filter PL 50 MIC	50 Micron	1	6

Cartridge Tank Pleated Sediment Filters

Flow rate testing was conducted by the manufacturer, Clack Corporation. Results may vary depending on water pressure, inlet water quality, flow rate, and system design. The flow rate is based on the initial use of a clean, new filter.

Testing verified using Cartridge Tank, In/Out Head, Bypass, and 1" fittings.

