

- Stainless Steel
 Connection
- 100% Butyl Diaphragm
- Polypropylene Liner
- Enhanced bottom dome
- NSF Standard 58 listed

Your customers demand the best!

Meet their demands with FLEXCON FRO Series Reverse Osmosis Storage Tanks!



FRO Series Reverse Osmosis Storage Tanks

Flexcon Industries has established itself as a leader in pressure tank technology. The FRO Series reverse osmosis storage tanks are the latest in a long line of innovative, high quality products. Made of superior materials and meeting the stringent standards of NSF 58, these tanks are available in 3 sizes. At the heart of the tank is a 100% butyl rubber diaphragm that has been post cured to eliminate any unwanted taste and odors. Combined with a polypropylene liner it keeps system water contained in a sealed water chamber. A double gasketed stainless steel connection assures the integrity of the water treatment system. The bottom dome of the smaller tanks has been enhanced with 4 rounded legs to insure installation stability and the 14 gallon tank includes a rugged poly base. Each tank is pressure tested and has a maximum working pressure of 125 PSI.








	Tank		Dimension		
Model	Volume	Capacity	Diameter	Height	Weight (lbs)
FRO 122	3.2	2.5	9"	13¾"	7.5 lbs
FRO 132	4.4	3.2	10.9"	13¾"	9 lbs
FRO 1070	14	10.3	15.2"	22½"	24 lbs

Maximum working Pressure: 125 PSI • Connection: 1/4" stainless steel MPT • Pre-charge: 7 psig

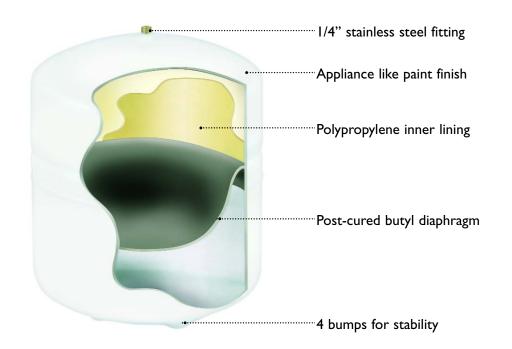

	Tank Precharge	Drawdownn Gallons @ Listed System Pressure							
Model	PSIG	20	30	40	50	60	70		
FRO 122	5	1.4	1.8	2.0	2.2	2.4	2.5		
	10	0.9	1.4	1.8	2.0	2.1	2.3		
FRO 132	5	1.9	2.5	2.8	3.1	3.2	3.4		
	10	1.3	2.0	2.4	2.7	2.9	3.1		
FRO 1070	5	6.0	7.8	9.0	9.7	10.3	10.7		
	10	4.0	6.3	7.7	8.7	9.4	9.9		



- HTX Series
 Hydronic Expansion Tanks
- WH Series
 Thermal Expansion Tanks
- PH Series
 Thermal Expansion Tanks
- PBS Series
 Pressure Booster Systems
- SSI Series Stainless Steel Indirect Fired Water Heaters
- GLI Series
 Glass Lined
 Indirect Fired Water Heaters



Flexcon Industries 300 Pond Street Randolph, Massachusetts 02368

> For More Information Call 1.781.986.2424 Fax 1.781.986.2029 www.flexconind.com



